



NSL-06S53


TO-18 Hermetic Photocell

Description

The NSL-06S53 is a Type 5 CdS photoconductive cell in a flat lens TO-18 package .

Absolute Maximum Ratings

Operating & Storage Temp	-60°C to +75°C
Power Dissipation @ 25°C (1)	50 mW
Voltage (peak AC or DC)	100 V
Soldering Temperature (3)	260°C

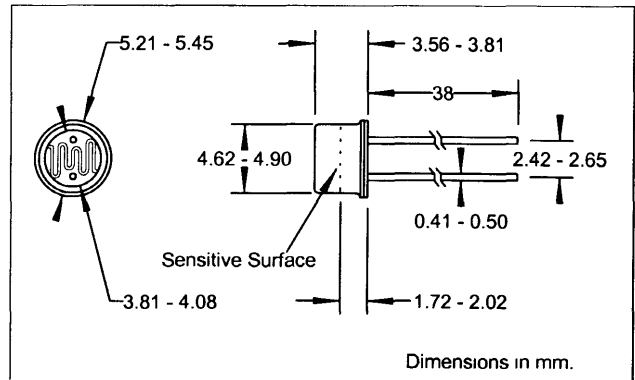

Electrical Characteristics (T_A=25°C, and source at 2854 °K) (2)

Symbol	Parameter	Min	Typ	Max.	Units	Test Conditions
R _L	Light Resistance	20		100	KΩ	10 lux
			5		KΩ	100 lux
R _D	Dark Resistance	20			MΩ	10 sec after removal of light
λ _P	Peak spectral wavelength		550		nm	
Γ	Gamma		0.7			1 - 10 Lux
Γ	Gamma		0.7			10 - 100 Lux

Specifications subject to change without notice

103856 REV 0

Notes: (1) derate linearly to zero at 75°C

(2) cells light adapted at 30 to 50 Ftc for 16 hrs. minimum prior to electrical tests

(3) ≥ 0.05" from case for < 10 sec.

2 Cogan Ave, Plattsburgh
 NY, 12901, USA
 Tel: 518-561-3160
 Fax: 514-747-3906

Northwich, Cheshire
 CW9 7TN, United Kingdom
 Tel: 01606-41999
 Fax: 01606-49706

2150 Ward, Montreal
 QC, H4M 1T7, Canada
 Tel: 514-744-5507
 Fax: 514-747-3906