


Seven Segment Display 10 mm (0.39")

HD 1105
HD 1107

Features

- Excellent readability by ambient light
- Excellent character appearance
- Evenly lighted segments
- Wide viewing angle $2\varphi = 50^\circ$
- Mitred corners on segments
- Grey package provides optimum contrast
- IC-compatible
- Right hand decimal

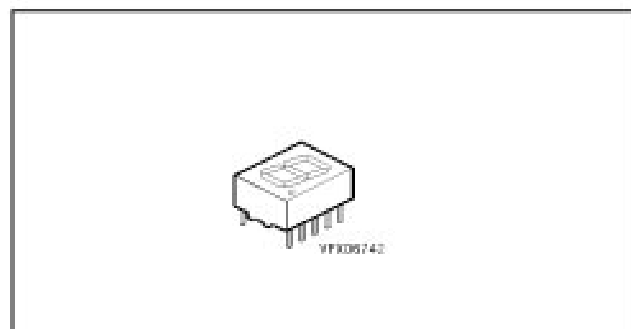

Type	Polarity	Color of emission	Luminous intensity/ Segment $I_F = 10 \text{ mA}$ $I_V (\mu\text{cd})$	Ordering code
HD 1105 R	common anode	red	550 (typ.)	Q68000-A5741
HD 1105 O		super-red	3500 (typ.)	Q68000-A5766
HD 1105 G		green	4000 (typ.)	Q68000-A6350
HD 1107 R	common cathode	red	550 (typ.)	Q68000-A5743
HD 1107 O		super-red	3500 (typ.)	Q68000-A5772
HD 1107 G		green	4000 (typ.)	Q68000-A6352

Maximum Ratings ($T_A = 25\text{ °C}$)

Description	Symbol	Value	Unit
Operating temperature range	T_{op}	0 ... + 85	°C
Storage temperature range	T_{stg}	- 40 ... + 85	°C
Lead soldering temperature, 2 mm from base	T_S	260	°C for 3 s
Peak forward current per segment or DP ¹⁾ $t_P \leq 10\ \mu\text{s}$ HD 110* R HD 110* O, -G	I_{FM} I_{FM}	500 150	mA mA
DC forward current per segment or DP ²⁾ HD 110* R HD 110* O, -G	I_F I_F	30 20	mA mA
Reverse voltage per segment or DP	V_R	6	V
Total power dissipation $T_A \leq 45\text{ °C}$	P_{tot}	480	mW

1) Do not exceed maximum average current per segment (see graph of the permissible pulse handling capability)

2) Derate maximum average current above $T_A = 75\text{ °C}$ at 0.5 mA/°C per segment


Characteristics ($T_A = 25\text{ °C}$)

Parameter	Symbol	Values			Unit
		min	typ.	ma	
Luminous intensity per segment, $I_F = 10\text{ mA}$ HD 1105 R, HD 1107 R HD 1105 O, HD 1107 O HD 1105 G, HD 1107 G	I_V I_V I_V	180 1100 1100	550 3500 4000	- - -	μcd μcd μcd
Peak wavelength, $I_F = 10\text{ mA}$ HD 1105 R, HD 1107 R HD 1105 O, HD 1107 O HD 1105 G, HD 1107 G	λ_{peak} λ_{peak} λ_{peak}	- - -	660 630 565	- - -	nm nm nm
Dominant wavelength (Digit average) HD 1105 R, HD 1107 R HD 1105 O, HD 1107 O HD 1105 G, HD 1107 G	λ_{dom} λ_{dom} λ_{dom}	- 612 562	645 - -	- 625 575	nm nm nm
Forward voltage per segment*, $I_F = 20\text{ mA}$ HD 1105 R, HD 1107 R HD 1105 O, HD 1107 O HD 1105 G, HD 1107 G	V_F V_F V_F	- - -	1.6 2.0 2.4	2.0 3.0 3.0	V V V
Break down voltage per segment* $I_R = 10\text{ }\mu\text{A}$	V_{BR}	6	15	-	V
Max. thermal resistance	R_{thJA}	-	-	120	$^{\circ}\text{C/W/Seg}$

*) AQL = 0.4%


Relative spectral emission $I_{rel} = f(\lambda)$

$V(\lambda)$ = Standard eye response curve

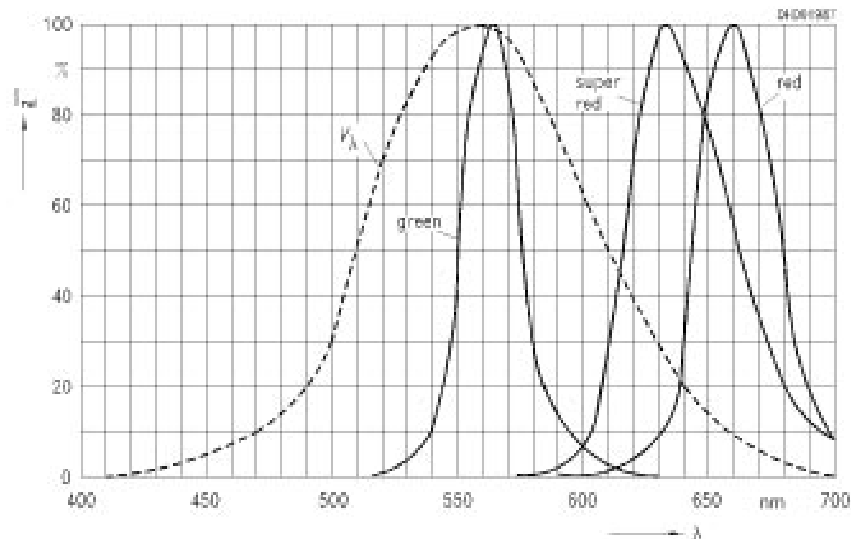


Forward current $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

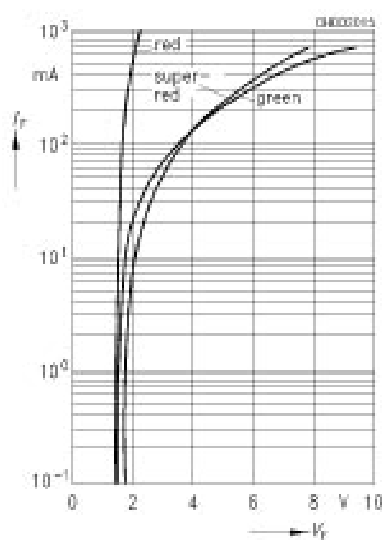

Rel. luminous intensity $I_v/I_v(25^\circ\text{C}) = f(T_A)$


$I_F = 10\text{ mA}$

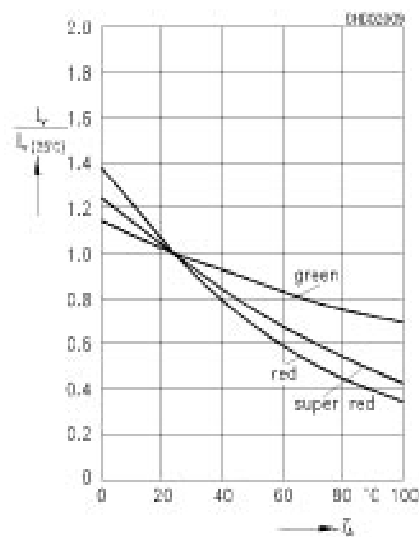

Permissible pulse handling capability

$$I_F = f(t_p), T_A \leq 45^\circ\text{C}$$


red

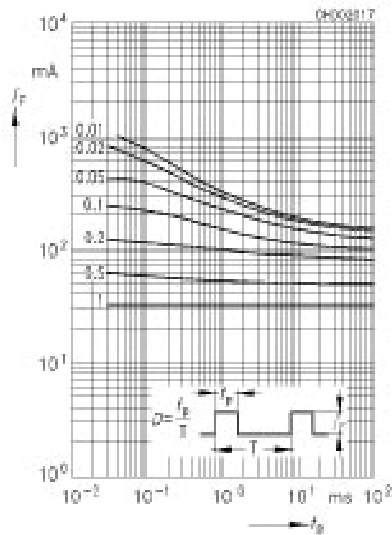

Permissible pulse handling capability


$$I_F = f(t_p), T_A \leq 45^\circ\text{C}$$

super-red, green

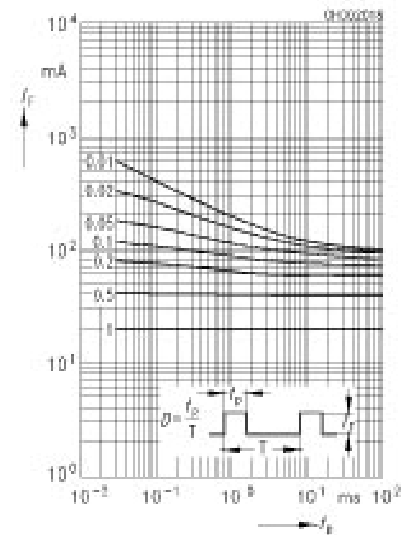


Max. permissible forward current

$$I_F = f(T_A)$$

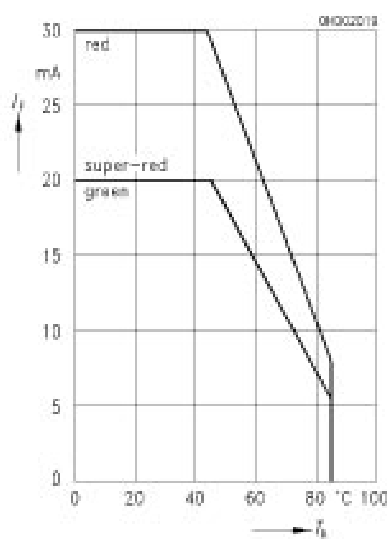


Rel. luminous intensity $I_V/I_V(10\text{ mA}) = f(I_F)$

$$T_A = 25^\circ\text{C}$$

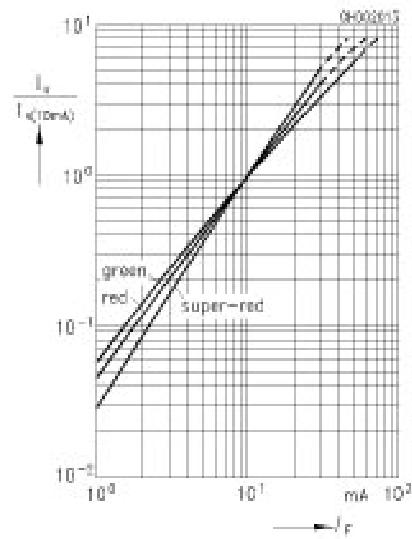

Total power dissipation $P_{tot} = f(T_A)$

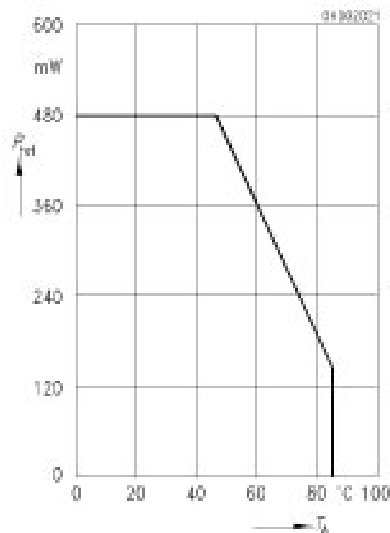

Package Outlines

